


Polys P-1a 650W

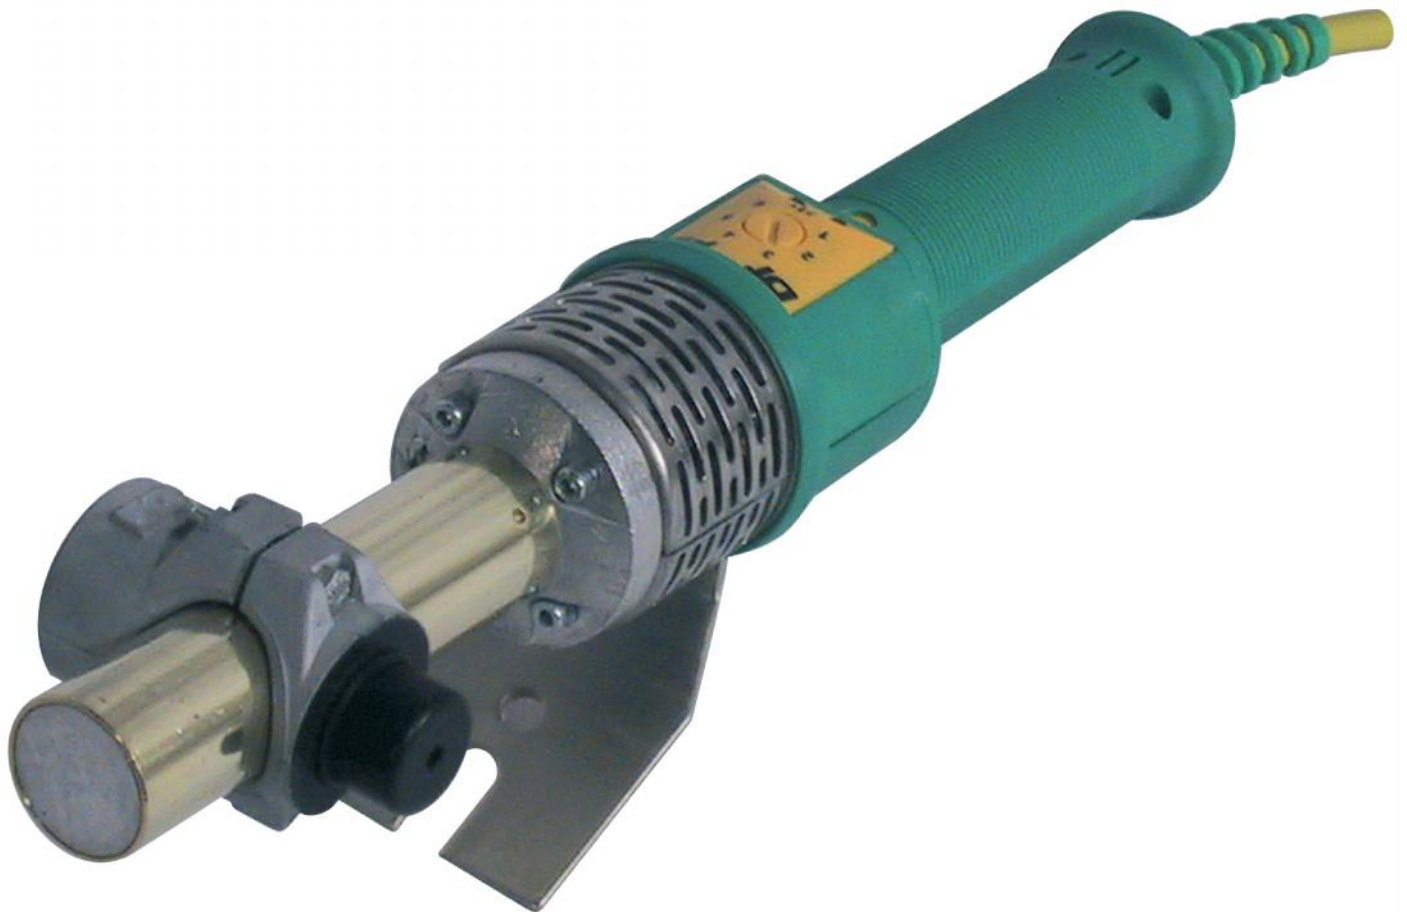

DYTRON s.r.o.
Toužimská 943/24a, 197 00 Praha 9 - Kbely, Czech
Tel.: +420-2-66190011-3, fax: +420-2-66190038
E-mail: sales@dytron.eu
<http://www.dytron.eu>

	2
1.	3
2.	3
3.	4
4.	4
4.1	Polys P-1a 650W SOLO	4
4.2	SP-1a 650W MINI	4
4.3	SP-1a 650W HOBBY	4
5.	5
5.1	5
5.2	5
5.3	5
5.4	5
5.5	5
5.6	DYNO	5
6.	6
6.1	6
6.2	6
6.3	7
7.	7
8.	7
9.	8

1.

DYTRON –

2.

Polys P-1a 650W

Ø32

« »
(... 6.1).

3



1 2 3

180–280°C

(1)

(2)

(3)

5-7°

320°

3.

:
 :
 :
 :
 : 16-63
 : 650
 : 220 , 50
 :
 : ±7°C
 : 1,3

4.

Polys P-1a 650W

:



4.1 Polys P-1a 650W SOLO

•
 • (6-) 4
 • /
 • 1,6

4.2

SP-1a 650W MINI

•
 • (20, 25 6- 32) 4
 • ()
 • /
 • MINI
 • 5,1



4.3

SP-1a 650W HOBBY

•
 • (16, 20, 25 6- 32) 4
 • ()
 • DYNO Ø42
 • /
 • 6,4

5.

5.1

DIN.



63

Ø90

16-
Plate100

) 4

6-

5.2



-4 -1.



5.3



-4 -1.

5.4



-4 -1.

5.5



5.6

DYNO

40



6.

6.1



()

6.2



- (2)
- (3)

180–280°C

6 (1)

- 1...150–175°C
- 2...175–195°C
- 3...195–215°C
- 4...215–235°C
- 5...235–255°C
- 6...255–280°C

PN10,

260°C.

DN 40	+10
DN 50	+10
DN 63	+15
Plate 100	+10

– 260°C.

(3)

5-10

(1),

(3)

6.3

(.)

()

3

	16	20	25	32	40	50	63
	5	5	7	8	12	12	24
	4	4	4	6	6	6	8
	6	6	10	10	20	20	30
	2	2	2	4	4	4	6

:

3 (PPRC).

/

7.

DYTRON s.r.o.

No.22/97 Sb.

168, 169, 170 and 173/97.

-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-

/

/

!

331600,

3-

1

3-

8.

DYTRON.

9.

- 1.
- 2.
- 3.
- 3.1.
- 3.2.
- 3.3.
- 3.4.

24

DYTRON
DYTRON.

6

- 4.
- 5.
- 5.1.
- 5.2.
- 5.3.
- 5.4.
- 5.5.
- 5.6.
- 5.7.
- 6.
- 7.

.3.1.,

.1.