

Polys P-4a 1200W TraceWeld



:

1	3
2	3
3	4
4	4
4.1	Polys P-4a 1200W TraceWeld SOLO	4
4.2	SP-4a 1200W TraceWeld PROFI (40-90)	4
4.3	SP-4a 1200W TraceWeld PROFI (63-110)	4
4.4	SP-4a 1200W TraceWeld PROFI (63-125)	4
5	5
5.1	5
5.2	5
5.3	5
5.4	5
5.5	5
5.6	5
6	6
6.1	6
6.2	6
6.3	6
6.4	7
7	7
8	8
9	8

1

DYTRON –

2


TraceWeld

110

Polys P-4a 1200W



TraceWeld –

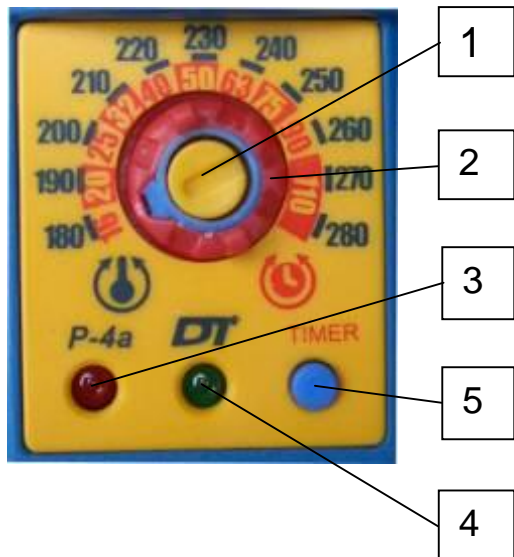

180-280°
(1).

(2).

Ø16).

TIMER (5).

(3)

(4)

3

:
 :
 :
 :
 :
 :
 :

16-125

1200
220 , 50

: ±1,5°C
1,8

4

Polys P-4a 1200W



4.1 Polys P-4a 1200W TraceWeld SOLO

•
 • (6-) 6
 •
 • /
 •
 • 2,1

4.2

SP-4a 1200W TraceWeld PROFI (40-90)

-
-
-
-
-
-
-

(6-) 6
40,50,63,75 90 ()

9,0



4.3

SP-4a 1200W TraceWeld PROFI (63-110)

-
-
-
-
-
-
-

(6-) 6
63,75, 90 110 ()

10,0



4.4

SP-4a 1200W TraceWeld PROFI (63-125)

-
-
-
-
-
-
-

(6-) 6
63,75, 90, 110 125 ()

12,0

5

5.1



DIN.

16-125 Polys P-4a 1200W TraceWeld

(6-) 6

5.2



-4 -1.



5.3



-4 -1.

5.4



5.5



-4 -1.

5.6

40



6



6.1

()



- 1
- 2
- 3
- 4
- 5

6.2

(3)
 (4)
 260°C.
 PN10,
 260, (1)
 !
 260°C.
 (4)
 5-10

(1),
 (4)

6.3

()
 ()

3

	16	20	25	32	40	50	63	75	90	110	125
	5	5	7	8	12	12	24	30	40	50	60
	4	4	4	6	6	6	8	8	8	10	10
	6	6	10	10	20	20	30	30	40	50	60
	2	2	2	4	4	4	6	6	6	8	8

3 (PPRC).


/

6.4

TraceWeld

(2)

(— 32).

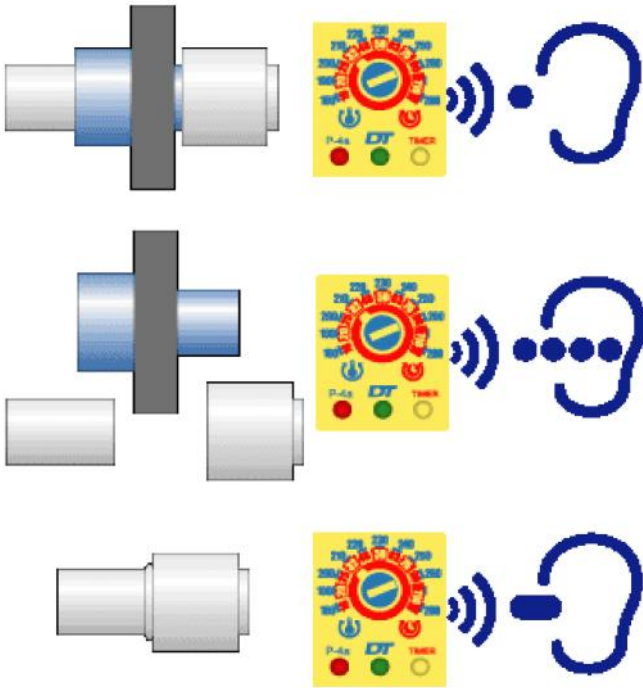

TIMER (5).

7

DYTRON s.r.o.

No.22/97 Sb.

168, 169, 170 and 173/97.

-
-
-
- /
- / !
-
-
-
- !
- 331600,
- 3- 1
- 3-
-
-

8

DYTRON.

9

1.

24

2.

3.

3.1.

DYTRON
DYTRON.

3.2.

3.3.

6

3.4.

4.

5.

5.1.

.3.1.,

5.2.

5.3.

5.4.

5.5.

5.6.

5.7.

6.

7.

.1.