

Working well under pressure!



PRESSURE WASHERS



Cam Spray started producing equipment in 1971 when we became the distributor for several manufacturers of industrial pumps. During the next thirty years we developed a complete line of pressure washers, drain jetting equipment, water pumps and other products for use in industrial and commercial applications. We have taken pride in producing high quality equipment used by professionals to get their job done right.

Cam Spray still resides within a city block of our original 1971 location. We still have the same family ownership that has put in place a management team that has been guiding the company since 1981. Many of the people you speak with have been working here since they entered the job market.

We are not a large company but we offer many things large companies do, without the hassles. We have a dependable workforce, great production capacity and we thoroughly test every product we produce. This makes Cam Spray your reliable source of quality machinery year after year!

Cam Spray manufactures over 180 stock models of equipment and offers fast shipment of custom machinery for the OEM and private label customers. Shipping orders usually the same day we receive the orders. Cam Spray offer EDI capabilities, online customer pricing, availability, and order entry, customized part numbers, and online order tracking. Service you can count on with technical assistance over the telephone, 24 hour turn around of repairs and a network of authorized service centers.

When companies around you seem to be changing daily, Cam Spray is much the same company we were in 1971. We think you will appreciate it.



Hot Water Pressure Washers

Hot Water Portable
and Stationary

Q Series: The Q Series portable hot water pressure washers are built on a heavy duty tube frame with four wheels for portability over all types of terrain. The Q Series models are equipped with diesel or kerosene fired burners in a variety of sizes powered by electric motors, gasoline or diesel engines.

SH Series: The SH Series portable hot water pressure washers are built on a tube frame cart with two wheels for portability to move from job to storage. The SH models are equipped with diesel or kerosene fired burners in a variety of sizes powered by electric motors.

CB Series: The CB Series hot water pressure washers are built on a heavy duty skid frame that can be mounted on a trailer, truck or just where the commercial cleaning needs to be done. The CB models are equipped with diesel or kerosene fired burners in a variety of sizes powered by gasoline engines.

ST Series: The ST Series stationary hot water pressure washers are built on a tube frame designed to be floor mounted. Like all hot water pressure washers the ST Series need to be properly vented if operated indoors. The ST Series machines are equipped with forced air burner technology fired by LP Gas or Natural Gas, and powered by electric motors.

STAT Series: The STAT Series stationary hot water pressure washers are built on a tube frame designed to be floor mounted. The Burner and Pressure washer modules are kept in two separate frames for ease of installation and maintenance. The pressure washer module features a 50 gallon reserve water tank for water supply feed. Like all hot water pressure washers the STAT Series need to be properly vented if operated indoors. The STAT Series machines are equipped with forced air burner technology fired by LP Gas or Natural Gas, and powered by electric motors.



Q Series

The Q Series Oil Fired Hot Water pressure washers offer extreme durability and portability in an electric motor, gasoline engine or diesel engine driven package.

Hot Water Portable and Stationary



- * Triplex plunger pump with ceramic plungers and stainless steel valves
- * Adjustable pressure
- * Adjustable Thermostat and pressure pop-off
- * Chemical Injection
- * Trigger Gun with 50' non marking hose
- * Dual wand with side handle and detergent tip
- * Quick change tips in 0°, 15°, 25° and 40°
- * Totally enclosed motor on electric models
- * Powder coated frame with wand/hose rack
- * 13" tires
- * Schedule 80 coil with stainless cold wrap
- * Rust free burner fuel tank
- * Oil fired burner uses diesel fuel or kerosene
- * Look for optional accessories like the swivel hose reel that mounts to the frame
- * All hot water machines must be properly vented if operated indoors
- * Gas and diesel powered models are fully portable, no electricity required, equipped with 12 volt oil fired burner
- * Thermal relief valve on pump
- * Group 24 battery not included on E/S models
- * Models with asterisks are UC1776 and CETL approved
- * 35' Powercord with GFCI on all electric models 7.5 h.p. and below. 10 h.p. models have 10' cord to be wired into GFCI breaker

| Model | PSI/bar | GPM/lpm | HP/cc | Voltage/Engine | Phase / Fuel Tank Cap. | Burner Fuel Capacity | Dimensions L x W x H | Ship Weight |
|---------|--------------|------------|----------|----------------------|------------------------|----------------------|----------------------|-------------|
| 1000QE* | 1000 / 69 | 3 / 11.4 | 2 h.p. | 120 Volt / 20 Amp | Single Phase | 5 Gallon | 36" x 30" x 48" | 350 lbs. |
| 1300QE | 1300 / 90 | 2 / 7.6 | 2 h.p. | 120 Volt / 20 Amp | Single Phase | 5 Gallon | 36" x 30" x 48" | 350 lbs. |
| 1500QE* | 1500 / 103.5 | 3 / 11.4 | 3 h.p. | 230 Volt / 20 Amp | Single Phase | 5 Gallon | 36" x 30" x 48" | 350 lbs. |
| 2000QE* | 2000 / 138 | 4 / 15.2 | 5 h.p. | 230 Volt / 28 Amp | Single Phase | 9 Gallon | 54" x 32" x 49" | 570 lbs. |
| 2555QE | 2500 / 172.5 | 5.5 / 20.9 | 10 h.p. | 230 Volt / 40 Amp | Single Phase | 9 Gallon | 54" x 32" x 49" | 600 lbs. |
| 3000QE* | 3000 / 207 | 4 / 15.2 | 7.5 h.p. | 230 Volt / 34 Amp | Single Phase | 9 Gallon | 54" x 32" x 49" | 600 lbs. |
| 3050QE | 3000 / 207 | 5 / 19 | 10 h.p. | 230 Volt / 40 Amp | Single Phase | 9 Gallon | 54" x 32" x 49" | 600 lbs. |
| 4000QE | 4000 / 276 | 4 / 15.2 | 10 h.p. | 230 Volt / 40 Amp | Single Phase | 9 Gallon | 54" x 32" x 49" | 600 lbs. |
| 2030QB | 2000 / 138 | 3 / 11.4 | 190 cc | Briggs Intek | 3.9 Quart | 5 Gallon | 36" x 30" x 48" | 500 lbs. |
| 3030QH | 3000 / 207 | 3 / 11.4 | 270 cc | Honda Recoil | 6.9 Quart | 5 Gallon | 36" x 30" x 48" | 550 lbs. |
| 3035QH | 3000 / 207 | 3.5 / 13.3 | 389 cc | Honda Electric Start | 6.9 Quart | 5 Gallon | 36" x 30" x 48" | 575 lbs. |
| 3535QH | 3500 / 242 | 3.5 / 13.3 | 389 cc | Honda Electric Start | 6.9 Quart | 5 Gallon | 36" x 30" x 48" | 575 lbs. |
| 3040QH | 3000 / 207 | 4 / 15.2 | 389 cc | Honda Electric Start | 6.9 Quart | 9 Gallon | 54" x 32" x 49" | 650 lbs. |
| 4040QB | 4000 / 276 | 4 / 15.2 | 480 cc | Briggs Vanguard E/S | 9 Quart | 9 Gallon | 54" x 32" x 49" | 700 lbs. |
| 25006QD | 2500 / 172.5 | 3 / 11.4 | 6.5 h.p. | Diesel | 5.3 Quarts | 9 Gallon | 36" x 30" x 48" | 400 lbs. |
| 3000QD | 3000 / 207 | 4 / 15.2 | 10 h.p. | Diesel | 5.3 Quarts | 9 Gallon | 54" x 32" x 49" | 650 lbs. |



SH Series

The SH Series Oil Fired Hot Water Pressure Washers are the workhorse of the shop, offering great portability and great features in a compact design.

Hot Water Portable
and Stationary



2000SHDE

- * Triplex plunger pump with ceramic plungers and stainless steel valves
- * Adjustable pressure
- * Adjustable Thermostat and pressure pop-off
- * Chemical Injection
- * Trigger Gun with 50' non marking hose
- * Dual wand with side handle and detergent tip
- * Quick change tips in 0°, 15°, 25° and 40°
- * Totally enclosed motor
- * Powder coated frame with wand/hose rack
- * 13" tires
- * Schedule 80 coil with stainless cold wrap
- * Rust free burner fuel tank
- * Oil fired burner uses diesel fuel or kerosene
- * Look for optional accessories like the swivel hose reel that mounts to the frame
- * All hot water machines must be properly vented if operated indoors
- * Thermal relief valve on pump
- * Models with astericks are UC1776 and CETL approved
- * 35' Power cord with GFCI protection

| Model | PSI/bar | GPM/lpm | HP/cc | Voltage/Engine | Phase / Fuel Tank Cap. | Burner Fuel Capacity | Dimensions L x W x H | Ship Weight |
|-----------|--------------|----------|----------|-------------------|------------------------|----------------------|----------------------|-------------|
| 1450SHDE | 1450 / 100 | 2 / 7.6 | 2 h.p. | 120 Volt / 20 Amp | Single Phase | 5 Gallon | 34" x 27" x 47" | 350 lbs. |
| 1000SHDE* | 1000 / 69 | 3 / 11.4 | 2 h.p. | 120 Volt / 20 Amp | Single Phase | 5 Gallon | 34" x 27" x 47" | 350 lbs. |
| 1500SHDE* | 1500 / 103.5 | 3 / 11.4 | 3 h.p. | 230 Volt / 20 Amp | Single Phase | 5 Gallon | 34" x 27" x 47" | 350 lbs. |
| 2000SHDE* | 2000 / 138 | 3 / 11.4 | 5 h.p. | 230 Volt / 25 Amp | Single Phase | 5 Gallon | 34" x 27" x 47" | 360 lbs. |
| 2000SHDE* | 2000 / 138 | 4 / 15.2 | 5 h.p. | 230 Volt / 28 Amp | Single Phase | 5 Gallon | 34" x 27" x 47" | 570 lbs. |
| 3000SHDE* | 3000 / 207 | 4 / 15.2 | 7.5 h.p. | 230 Volt / 34 Amp | Single Phase | 5 Gallon | 34" x 27" x 47" | 600 lbs. |



MCB-CB Series

The CB Series Hot Water Pressure Washers are the ultimate cleaning machines for the professional cleaning contractor. Designed for durability and versatility.

Hot Water Portable
and Stationary



MCB4040V



4055CBG

- * Fully portable, no electricity required
- * Triplex plunger pump with ceramic plungers, stainless steel valves and thermal relief
- * 12 Volt DC Burner on the MCB Models, 120 Volt Burner with 2500 watt generator on the 4055CBG
- * Industrial Gasoline Engines
- * Adjustable pressure
- * Adjustable Thermostat and pressure pop-off
- * Chemical Injection
- * Trigger Gun with 36" wand and 0,15,25 and 40 degree nozzles
- * 50' x 3/8" non marking hose
- * Powder coated frame with wand/hose rack
- * Schedule 80 coil with stainless cold wrap
- * 9 gallon rust free poly fuel tanks
- * Oil fired burner uses diesel fuel or kerosene
- * Look for optional accessories like the swivel hose reel that mounts to the frame
- * Group 24 battery not included on E/S models

| Model | PSI/bar | GPM/lpm | HP/cc | Voltage/Engine | Phase / Fuel Tank Cap. | Burner Fuel Capacity | Dimensions L x W x H | Ship Weight |
|----------|------------|-------------|--------|----------------------|------------------------|----------------------|----------------------|-------------|
| MCB2030B | 2000 / 138 | 3 / 11.4 | 190 cc | Briggs Intek | 3.9 Quart | 9 Gallon | 42" x 35" x 45" | 500 lbs. |
| MCB3030H | 3000 / 207 | 3 / 11.4 | 270 cc | Honda Recoil | 6.9 Quart | 9 Gallon | 42" x 35" x 45" | 550 lbs. |
| MCB3040H | 3000 / 207 | 4 / 15.2 | 389 cc | Honda Electric Start | 6.9 Quart | 9 Gallon | 42" x 35" x 45" | 650 lbs. |
| MCB4040V | 4000 / 276 | 4 / 15.2 | 480 cc | Briggs Vanguard E/S | 9 Quart | 9 Gallon | 42" x 35" x 45" | 700 lbs. |
| MCB5055H | 5000 / 345 | 5.5 / 20.9 | 688 cc | Honda E/S | 5 Gallon | 9 Gallon | 42" x 35" x 45" | 775 lbs. |
| MCB6050H | 6000 / 414 | 5.0 / 19.0 | 688 cc | Honda E/S | 5 Gallon | 9 Gallon | 42" x 35" x 45" | 775 lbs. |
| MCB7042H | 7000 / 483 | 4.2 / 15.96 | 688 cc | Honda E/S | 5 Gallon | 9 Gallon | 42" x 35" x 45" | 775 lbs. |
| MCB7042H | 7000 / 483 | 4.2 / 15.96 | 688 cc | Honda E/S | 5 Gallon | 9 Gallon | 42" x 35" x 45" | 665 lbs |



ST Series

ST Frame Hot Water Propane or Natural Gas fired Pressure Washers utilize the latest in forced air burner technology to offer unsurpassed performance and reliability.



2000STNEF

- * FORCED AIR BURNER TECHNOLOGY WITH ELECTRONIC IGNITION
- * Triplex plunger pump with ceramic plungers and stainless steel valves and thermal relief
- * Adjustable pressure
- * Adjustable Thermostat and pressure pop-off
- * Chemical Injection
- * Trigger Gun with 50' non marking hose
- * Dual wand with side handle and detergent tip
- * Quick change tips in 0°, 15°, 25° and 40°
- * Totally enclosed motor
- * Powder coated frame
- * Schedule 80 coil with stainless cold wrap
- * Look for optional accessories like the swivel hose reel that mounts to the frame
- * All hot water machines must be properly vented if operated indoors.
- * 35' Power cord with GFCI on all electric models 7.5 h.p. and below, 10 h.p. models have 10' powercord to be wired into GFCI breaker.

Hot Water Portable and Stationary

| Model | PSI/bar | GPM/lpm | HP/cc | Voltage/Engine | Phase / Fuel Tank Cap. | Burner Fuel Capacity | Dimensions L x W x H | Ship Weight |
|-----------|--------------|------------|----------|-------------------|------------------------|----------------------|----------------------|-------------|
| 1000STLEF | 1000 / 69 | 3 / 11.4 | 2 h.p. | 120 Volt / 20 Amp | Single Phase | Liquid Propane | 47"x29"x46" | 400 lbs. |
| 1000STNEF | 1000 / 69 | 3 / 11.4 | 2 h.p. | 120 Volt / 20 Amp | Single Phase | Natural Gas | 47"x29"x46" | 400 lbs. |
| 1500STLEF | 1500 / 103.5 | 3 / 11.4 | 3 h.p. | 230 Volt / 20 Amp | Single Phase | Liquid Propane | 47"x29"x46" | 400 lbs. |
| 1500STNEF | 1500 / 103.5 | 3 / 11.4 | 3 h.p. | 230 Volt / 20 Amp | Single Phase | Natural Gas | 47"x29"x46" | 400 lbs. |
| 2000STLEF | 2000 / 138 | 4 / 15.2 | 5 h.p. | 230 Volt / 28 Amp | Single Phase | Liquid Propane | 47"x29"x46" | 570 lbs. |
| 2000STNEF | 2000 / 138 | 4 / 15.2 | 5 h.p. | 230 Volt / 28 Amp | Single Phase | Natural Gas | 47"x29"x46" | 570 lbs. |
| 2555STLEF | 2500 / 172.5 | 5.5 / 20.9 | 10 h.p. | 230 Volt / 40 Amp | Single Phase | Liquid Propane | 47"x29"x46" | 625 lbs. |
| 2555STNEF | 2500 / 172.5 | 5.5 / 20.9 | 10 h.p. | 230 Volt / 40 Amp | Single Phase | Natural Gas | 47"x29"x46" | 625 lbs. |
| 3000STLEF | 3000 / 207 | 4 / 15.2 | 7.5 h.p. | 230 Volt / 34 Amp | Single Phase | Liquid Propane | 47"x29"x46" | 600 lbs. |
| 3000STNEF | 3000 / 207 | 4 / 15.2 | 7.5 h.p. | 230 Volt / 34 Amp | Single Phase | Natural Gas | 47"x29"x46" | 600 lbs. |



STAT Series

Stat frame Hot Water Propane or Natural Gas fired hot water pressure washers utilize the latest in forced air burner technology to offer unparalleled performance and reliability.

Hot Water Portable
and Stationary



- * FORCED AIR BURNER TECHNOLOGY WITH ELECTRONIC IGNITION
- * Triplex plunger pump with ceramic plungers and stainless steel valves
- * Adjustable pressure
- * Adjustable Thermostat and pressure pop-off
- * Chemical Injection
- * Trigger Gun with 50' non marking hose
- * Dual wand with side handle and detergent tip
- * Quick change tips in 0°, 15°, 25° and 40°
- * 8 gpm machines designed to operate two guns at 4 gpm each
- * Totally enclosed electric motor
- * Powder coat frame
- * Schedule 80 coil with stainless cold wrap
- * Look for optional accessories like the swivel hose reel that mounts to the frame
- * All hot water machines must be properly vented if operated indoors
- * 10' Power cord to be hard wired into circuit protected by a GFCI breaker

| Model | PSI/bar | GPM/lpm | HP/cc | Voltage/Engine | Phase / Fuel Tank Cap. | Burner Fuel Capacity | Dimensions L x W x H | Ship Weight |
|-------------|--------------|------------|----------|-------------------|------------------------|----------------------|----------------------|-------------|
| 208STATLEF | 2000 / 138 | 8 / 30.4 | 10 h.p. | 230 Volt / 40 Amp | Single Phase | Liquid Propane | 60" x 29" x 56" | 820 lbs. |
| 208STATNEF | 2000 / 138 | 8 / 30.4 | 10 h.p. | 230 Volt / 40 Amp | Single Phase | Natural Gas | 60" x 29" x 56" | 820 lbs. |
| 2555STATLEF | 2500 / 172.5 | 5.5 / 20.9 | 10 h.p. | 230 Volt / 40 Amp | Single Phase | Liquid Propane | 60" x 29" x 56" | 820 lbs. |
| 2555STATNEF | 2500 / 172.5 | 5.5 / 20.9 | 10 h.p. | 230 Volt / 40 Amp | Single Phase | Natural Gas | 60" x 29" x 56" | 820 lbs. |
| 3040STATLEF | 3000 / 207 | 4 / 15.2 | 7.5 h.p. | 230 Volt / 34 Amp | Single Phase | Liquid Propane | 60" x 29" x 56" | 800 lbs. |
| 3040STATNEF | 3000 / 207 | 4 / 15.2 | 7.5 h.p. | 230 Volt / 34 Amp | Single Phase | Natural Gas | 60" x 29" x 56" | 800 lbs. |



Trailer Mounted Cold and Hot Water Pressure Washers

Hot Water Trailer Models: If you have commercial cleaning to do that requires portability, durability, hot water capabilities and water supply the CGB and UV Series Hot Water Trailer mounted machines are the choice for you. All trailers are powder coated with full diamond plate decking. These machines are built with the highest quality components and features requested by cleaning professionals.

Cold Water Trailer Models: If you have commercial cleaning to do that requires portability, durability, and your own water supply the Cold Water Trailer mounted machines are the choice for you. All trailers are powder coated with full diamond plate decking. These machines are built with the highest quality components and features requested by cleaning professionals. These machines are the number one seller for car lots and auto detailing on the go.

Hot and Cold Water
Trailer Mounted



Hot Water Trailer Models

Cam Spray trailer mounted hot water pressure washers combine the durability, versatility with portability. Everything you need at your fingertips for the toughest of cleaning jobs.

UV4040V-Hot



- * The UV Series machines are designed to be pulled behind a truck, mule, Gator or Ranger for facility maintenance featuring a 2" ball hitch with a 3 height position tongue
- * Triplex plunger pump with ceramic plungers and stainless steel valves
- * Adjustable pressure unloader valve
- * Adjustable Thermostat and pressure pop-off
- * Chemical Injection
- * 100' x 3/8" pressure hose on manual reel
- * 150' x 5/8" garden hose for tank refill and a manual reel
- * Trigger Gun with 100' non marking hose
- * Dual wand with side handle and detergent tip
- * Quick change tips in 0°, 15°, 25° and 40°
- * Powder coat frame and trailer
- * Trailer has full diamond plate deck, lights and is road ready
- * Schedule 80 coil with cold wrap
- * Oil fired burner uses diesel fuel or kerosene

CBG4055DT




| Model | PSI/bar | GPM/lpm | HP/cc | Engine | Water Tank Capacity | Engine Tank Capacity | Burner Fuel Capacity | Dimensions L x W x H | Ship Weight |
|-------------|------------|-------------|---------|---------------|---------------------|----------------------|----------------------|----------------------|-------------|
| UV2030B-HOT | 2000 / 138 | 3 / 11.4 | 190 cc | Briggs Intek | 130 gallon | 3.9 Quart | 9 Gallon | 132" x 60" x 48" | 1000 lbs. |
| UV3030H-HOT | 3000 / 207 | 3 / 11.4 | 270 cc | Honda Recoil | 130 gallon | 6.9 Quart | 9 Gallon | 132" x 60" x 48" | 1000 lbs. |
| UV3040H-HOT | 3000 / 207 | 4 / 15.2 | 389 cc | Honda E-Start | 130 gallon | 6.9 Quart | 9 Gallon | 132" x 60" x 48" | 1000 lbs. |
| UV4040V-HOT | 4000 / 276 | 4 / 15.2 | 480 cc | Vanguard E/S | 130 gallon | 5 Gallon | 9 Gallon | 132" x 60" x 48" | 1000 lbs. |
| CBG3040HT | 3000 / 207 | 4 / 15.2 | 389 cc | Honda | 300 gallon | 6.9 Quart | 9 Gallon | 186" x 74" x 72" | 2100 lbs. |
| CBG4055HT | 4000 / 276 | 5.5 / 20.9 | 688 cc | Honda | 300 gallon | 5 Gallon | 9 Gallon | 186" x 74" x 72" | 2200 lbs. |
| CBG3055DT | 3000 / 207 | 5.5 / 20.9 | 14 h.p. | Diesel | 300 gallon | 9 Gallon | 9 Gallon | 186" x 74" x 72" | 2200 lbs. |
| CBG5055HT | 5000 / 345 | 5.5 / 20.9 | 688 cc | Honda | 300 gallon | 9 Gallon | 9 Gallon | 186" x 74" x 72" | 2200 lbs. |
| CBG6050HT | 6000 / 414 | 5.0 / 19.0 | 688 cc | Honda | 300 gallon | 9 Gallon | 9 Gallon | 186" x 74" x 72" | 2200 lbs. |
| CBG7042HT | 7000 / 483 | 4.2 / 15.96 | 688 cc | Honda | 300 gallon | 9 Gallon | 9 Gallon | 186" x 74" x 72" | 2200 lbs. |



Cold Water Trailer Models

Cam Spray's trailer mounted pressure washers—for on the go industrial and commercial pressure washers no matter where you have to be

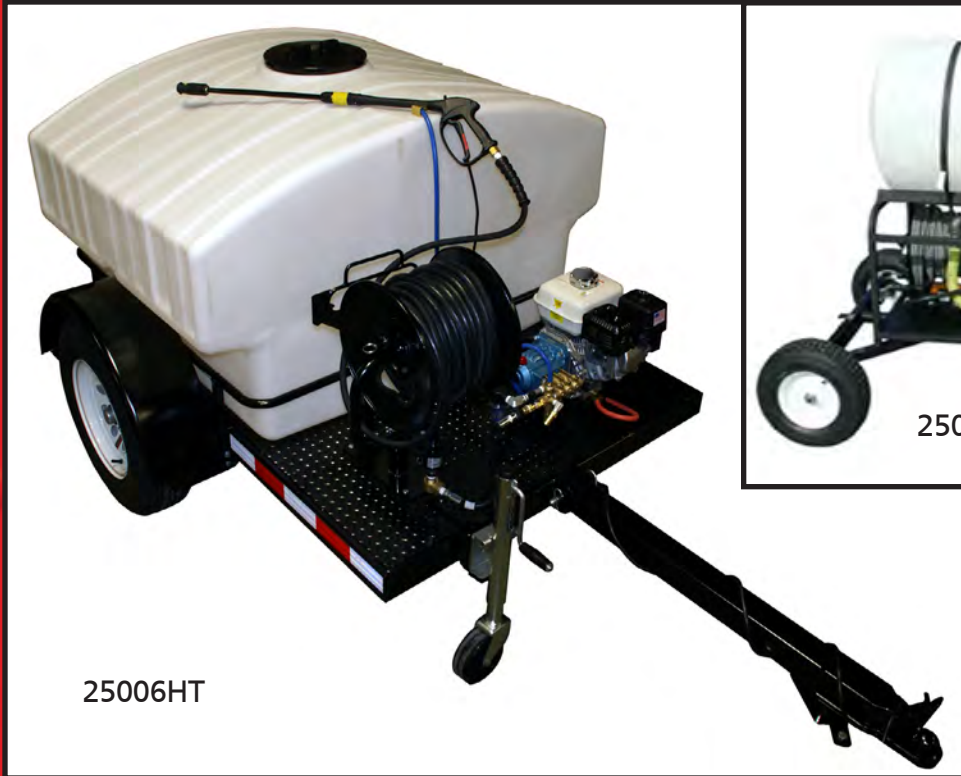

25006HT



25006HHC

Hot and Cold Water
Trailer Mounted

- * Triplex plunger pump with ceramic plungers and stainless steel valves
- * Adjustable pressure
- * Chemical Injection
- * Swivel hose reel
- * Trigger Gun
- * 36" wand
- * Quick change tips in 0°, 15°, 25° and 40° on 4 gpm machines and larger.
- * Powder coat frame
- * Roto-molded tank with automatic shut-off if machine runs dry
- * Trailer machines have lights and are road ready with 14" wheels and 3500# axle
- * Group 24 battery not included on E/S models

| Model | PSI/bar | GPM/lpm | HP/cc | Voltage/Engine | Phase / Fuel Tank Cap. | Burner Fuel Capacity | Dimensions L x W x H | Ship Weight |
|----------|--------------|------------|----------|----------------|------------------------|----------------------|----------------------|-------------|
| 25006HHC | 2500 / 172.5 | 3 / 11.4 | 196 cc | Honda | 50 | 3.9 Quarts | 124" X 50" X 49" | 450 lbs |
| 3035HHC | 3000 / 207 | 3.5 / 13.3 | 389 cc | Honda | 50 | 3.9 Quarts | 124" X 50" X 49" | 500 lbs |
| 25006HT | 2500 / 172.5 | 3 / 11.4 | 196 cc | Honda | 300 | 3.9 Quarts | 136" x 74" x 60" | 830 lbs. |
| 3000HT | 3000 / 207 | 4 / 15.2 | 389 cc | Honda E/S | 300 | 6.9 Quarts | 136" x 74" x 60" | 850 lbs. |
| 4000BT | 4000 / 276 | 4 / 15.2 | 480 cc | Vanguard E/S | 300 | 9 Quart | 136" x 74" x 60" | 875 lbs. |
| 25006DT | 2500 / 172.5 | 3 / 11.4 | 6.5 h.p. | Diesel | 300 | 5.3 Quarts | 136" x 74" x 60" | 930 lbs. |
| 4000DT | 4000 / 276 | 4 / 15.2 | 14 h.p. | Diesel E/S | 300 | 5.3 Quarts | 136" x 74" x 60" | 900 lbs. |



Cold Water Gas and Diesel Models

Master Frame Models: Cam Spray Master Frame gas powered cold water models are for the commercial and industrial washing applications. The Master Frame models are built for extreme durability and portability for the toughest of jobs.

Cart Frame Models: Cam Spray Gas Powered Cold Water Pressure Washers are available in a variety of sizes for every application. From homeowner to cleaning contractor these machines satisfy those that require a professional grade, versatile machine.

Diesel Cart Models: Cam Spray Diesel Powered Cart Mounted Models are made with the durable Hatz Diesel Engine for long hours of dependable operation in the most demanding applications. Mounted on a powder coated, heavy frame cart with foam filled tires.

Diesel Skid Models: Cam Spray Diesel Powered Skid Models are made with the durable Hatz Diesel Engine for long hours of dependable operation in the most demanding applications. Mounted on a heavy duty powder coated skid frame.

Pickup Mount: Cam Spray's Pick-Up Mount Models are ready for on the go industrial and commercial cleaning. Made to slide into pick-up truck boxes between the wheel wells. MPM Models were designed for the smaller sized pickups and the PM models for larger 1/2 and 3/4 ton trucks.



Gas Powered Master Frame

Cam Spray Master Frame gas powered cold water machines are for the commercial and industrial washing applications. The Master Frame models are built for extreme durability and portability for the toughest of jobs.



Cold Water Gas and Diesel Powered

- * Triplex plunger pump with ceramic plungers and stainless steel valves
- * 50' x 3/8" non marking hose
- * Adjustable Pressure
- * Thermal Relief valve
- * Trigger Gun with 50' non marking hose
- * Heavy duty wand with 0, 15, 25, and 40 degree nozzle
- * Powder coated frame
- * Group SP30 battery not included on gas models with E/S
- * 7000HXR includes a manual hose reel as shown

| Model | PSI/bar | GPM/lpm | cc | Engine | Engine Fuel Capacity | Pump Max Temp | Dimensions L x W x H | Ship Weight |
|---------|------------|----------|--------|-----------------|----------------------|---------------|----------------------|-------------|
| 3000HM | 3000/207 | 4/15.2 | 389 cc | Honda | 6.9 Quarts | 160° F | 48" x 29" x 40" | 210 lbs. |
| 4000BM | 4000/276 | 4/15.2 | 480 cc | Briggs Vanguard | 9 Quarts | 160° F | 48" x 29" x 40" | 235 lbs. |
| 5000HXR | 5000/345 | 4.5/17.1 | 688 cc | Honda | 5 Gallon | 160° F | 48" x 29" x 44" | 265 lbs. |
| 7000HXR | 7000/482.6 | 5.5 | 688 cc | Honda | 5 Gallon | 160° F | 48" x 29" x 44" | 350 lbs. |
| 5055HRC | 5000/345 | 5.5/20.8 | 688 cc | Honda | 5 Gallon | 160° F | 34" x 42" x 42" | 450 lbs. |
| 6050HRC | 6000/413.7 | 5/18.9 | 688 cc | Honda | 5 Gallon | 160° F | 34" x 42" x 42" | 450 lbs. |
| 7042HRC | 7000/482.6 | 4.2/15.8 | 688 cc | Honda | 5 Gallon | 160° F | 34" x 42" x 42" | 450 lbs. |



Gas Powered Cart

Cam Spray Gas Powered Cold Water Pressure Washers are available in a variety of sizes for every application. From homeowner to cleaning contractor these machines satisfy those that require a professional grade, versatile machine.

- * Triplex plunger pump with ceramic plungers and stainless steel valves
- * Adjustable pressure
- * Thermal relief valve
- * Chemical Injection
- * Trigger Gun with 36" wand and 50' non-marking hose
- * Quick change tips in 0°, 15°, 25°, 40° and soap tip on 4 gpm machines
- * Multi-reg zero to sixty degree pattern tip with Hi-Low for chemical injection on 3 gpm machines and below (2700HX has interchangeable tips)
- * Powder coated frame with wand/hose rack and accessory reel bracket
- * 10" tires
- * Three gallon chemical tank (2800GCX has no chemical tank)
- * Add an accessory reel



3500HXS

Cold Water Gas and Diesel Powered

| Model | PSI/bar | GPM/lpm | cc | Engine | Engine Fuel Capacity | Pump Max Temp | Dimensions L x W x H | Ship Weight |
|----------|--------------|------------|--------|----------|----------------------|---------------|----------------------|-------------|
| 1600HX | 1600 / 110.4 | 3 / 11.4 | 160 cc | Honda GC | 1.9 Quarts | 160° F | 30" x 21.5" x 36" | 87 lbs. |
| 2800GCX* | 2800 / 193.2 | 2.5 / 9.5 | 160 cc | Honda GC | 1.9 Quarts | 140° F | 30" x 21.5" x 36" | 105 lbs. |
| 2700HX | 2700 / 183.3 | 3 / 11.4 | 196 cc | Honda | 3.9 Quarts | 160° F | 30" x 21.5" x 36" | 108 lbs. |
| 3000HXA* | 3000 / 207 | 3 / 11.4 | 270 cc | Honda | 6.4 Quarts | 140° F | 37" x 23.5" x 36" | 150 lbs. |
| 3500HXS | 3500 / 241.5 | 4 / 15.2 | 389 cc | Honda | 6.9 Quarts | 160° F | 37" x 23.5" x 36" | 170 lbs. |
| 4000HXS | 4000 / 276 | 3.5 / 13.3 | 389 cc | Honda | 6.9 Quarts | 160° F | 37" x 23.5" x 36" | 170 lbs. |



Diesel Powered Cart

Cam Spray Diesel Powered Cart Mounted Models are made with the durable Hatz Diesel Engine for long hours of dependable operation in the most demanding applications.



25006DX

3000DX

- * Triplex plunger pump with ceramic plungers and stainless steel valves
- * Adjustable pressure
- * Thermal relief valve
- * Chemical Injection
- * Trigger Gun with 50' non marking hose
- * Heavy duty 36" wand with quick change tips in 0°, 15°, 25°, 40° soap tip
- * Aluminum frame on 3000 models, powder coated tube frame on 25006 model
- * 10" tires
- * Group SP30 battery not included on E/S models


Cold Water Gas and Diesel Powered

| Model | PSI/bar | GPM/lpm | HP | Engine | Engine Fuel Capacity | Pump Max Temp | Dimensions L x W x H | Ship Weight |
|---------|--------------|----------|----------|----------------|----------------------|---------------|----------------------|-------------|
| 25006DX | 2500 / 172.5 | 3 / 11.4 | 6.5 h.p. | Diesel | 5.3 Quarts | 160° F | 30" x 21.5" x 36" | 185 lbs. |
| 3000DX | 3000 / 207 | 4 / 15.2 | 10 h.p. | Diesel | 5.3 Quarts | 160° F | 48" x 29" x 44" | 265 lbs. |
| 3000DXE | 3000 / 207 | 4 / 15.2 | 10 h.p. | Diesel E-Start | 5.3 Quarts | 160° F | 48" x 29" x 44" | 295 lbs. |



Diesel Powered Skid

Cam Spray Diesel Powered Skid Models are made with the durable Hatz Diesel Engine for long hours of dependable operation in the most demanding applications.

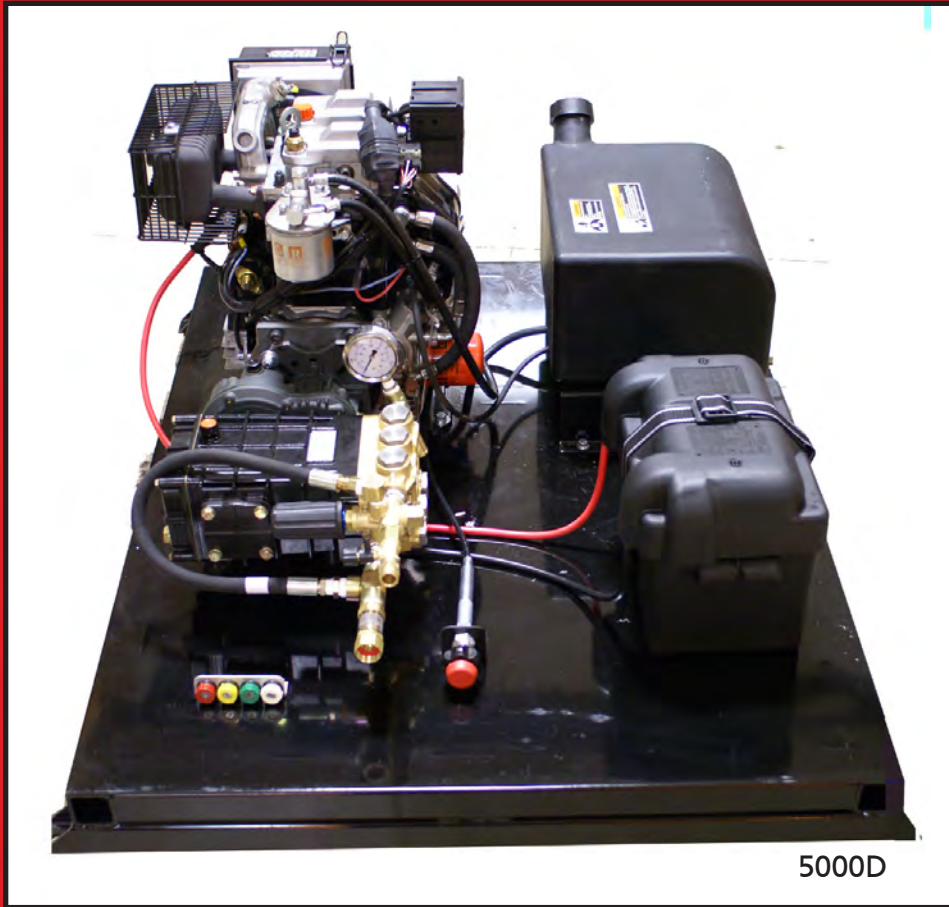

5000D

- * Triplex plunger pump with ceramic plungers and stainless steel valves
- * Adjustable pressure
- * Thermal relief valve
- * Chemical Injection
- * Trigger Gun with 50' non marking hose
- * Heavy duty 36" wand with quick change tips in 0°, 15°, 25°, 40° soap tip
- * Powder coat frame
- * Group 24 battery not included on E/S models


| Model | PSI/bar | GPM/lpm | HP | Engine | Engine Fuel Capacity | Pump Max Temp | Dimensions L x W x H | Ship Weight |
|-------|------------|------------|---------|------------|----------------------|---------------|----------------------|-------------|
| 3000D | 3000 / 207 | 4 / 15.2 | 10 h.p. | Diesel E/S | 5.3 Quarts | 160° F | 36" x 30" x 30" | 255 lbs. |
| 4000D | 4000 / 276 | 4 / 15.2 | 14 h.p. | Diesel E/S | 7.4 Quarts | 160° F | 36" x 30" x 30" | 300 lbs. |
| 5000D | 5000 / 345 | 4.5 / 17.1 | 20 h.p. | Diesel E/S | 7.4 Quarts | 160° F | 36" x 30" x 30" | 500 lbs. |

Cold Water Gas and Diesel Powered



Pickup Mount

Cam Spray's Pick-Up Mount Models are ready for on the go industrial and commercial cleaning. Made to slide into pick-up truck boxes between the wheel wells. MPM Models were designed for the smaller sized pickups and the PM models for larger 1/2 and 3/4 ton trucks.

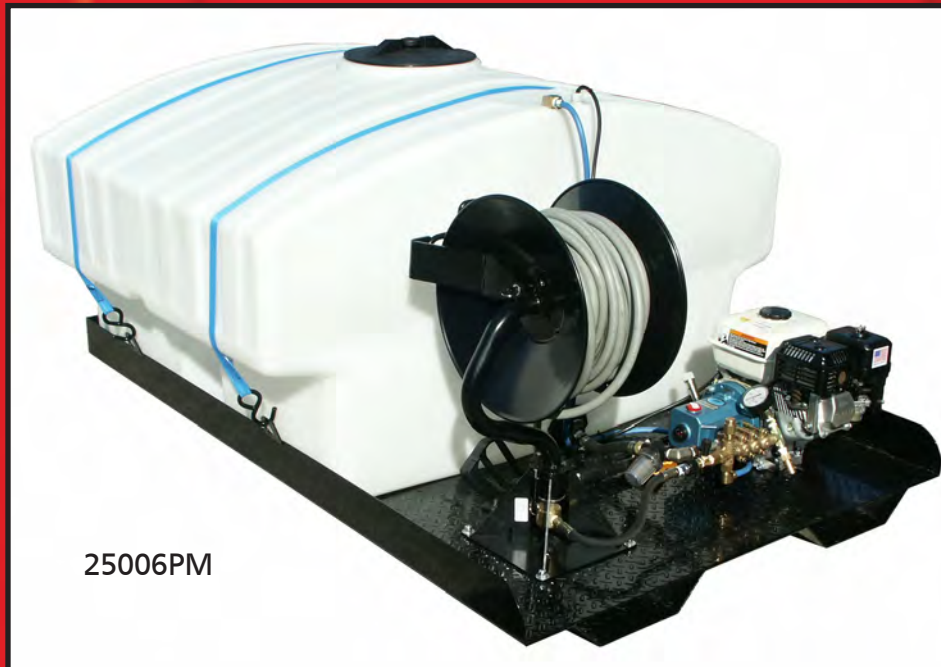

25006PM

Cold Water Gas and Diesel Powered

- * Triplex plunger pump with ceramic plungers and stainless steel valves
- * Adjustable pressure
- * Chemical Injection
- * Swivel hose reel with 100' non-marking hose
- * Trigger Gun
- * 36" wand with multi-reg adjustable nozzle
- * Powder coat frame with forklift slots in frame for machine lifting
- * Roto-molded tank with automatic shut-off if machine runs dry

| Model | PSI/bar | GPM/lpm | HP | Engine | Water Tank-Capacity | Pump Max Temp | Dimensions L x W x H | Ship Weight |
|----------|--------------|----------|--------|--------|---------------------|---------------|----------------------|-------------|
| 25006MPM | 2500 / 172.5 | 3 / 11.4 | 196 cc | Honda | 150 | 3.9 Quarts | 72" x 62" x 38" | 550 lbs. |
| 25006PM | 2500 / 172.5 | 3 / 11.4 | 196 cc | Honda | 300 | 3.9 Quarts | 72" x 62" x 38" | 600 lbs. |



Cold Water Electric Powered

Cam Spray Cold Water Electric Models come in a variety of packages as listed below. Make clean-up of grease, dirt and grime quick and enjoyable by choosing the best style for your application.

Tube Cart – The Cam Spray tube cart electric pressure washer model has a completely enclosed motor. A great economical choice for pressure washing.

Wall Mount – Cam Spray wall mount cold water electric pressure washers help you conserve space while utilizing the high powered electric pressure washing ability of this unit. Great for businesses like restaurants, food processing, wash bays, car dealerships and auto detailing.

Roto Cart – The Roto Cart pressure washer has a rotationally molded cart that avoids rust and corrosion and is also a 6 gallon chemical tank. A quiet running motor and portability make this a great pressure washing choice.

MX Cart – The MX Cart models are built on a heavy powder coated steel frame and are great for commercial use on your vehicles, driveways, decks, siding and other pressure washing projects.

Command Cart – The Cam Spray command cart pressure washer model has a totally enclosed motor, 8" wheels, a roto-molded cart frame that stays free from rust and corrosion. The command cart has a holder for a 1 gallon jug of chemicals.

Base Mount – Cam Spray base mounted pressure washers that are ideal for detail shops, automotive, motorcycle and equipment dealerships. Our base mount pressure washers have sturdy base mount plates designed for shelf or permanent installation.

Hand Carry – The hand carry Cam Spray pressure washers can be conveniently moved and transported for pressure washing on location or in-shop.



Tube Cart

The Cam Spray tube cart electric pressure washer model has a completely enclosed motor and some models are capable of handling up to 180 degree water. A great economical choice for pressure washing.



- * Triplex plunger pump with ceramic plungers and stainless steel valves
- * Adjustable pressure
- * Chemical Injection
- * Trigger Gun and 50' non-marking hose
- * Two piece wand with multi-reg zero to sixty degree pattern tip with Hi-Low for chemical injection on 1000-1500 psi models
- * Totally enclosed fan cooled motor
- * D model pumps handle fluids up to 180° degrees fahrenheit
- * Powder coated frame with wand/hose rack and accessory reel bracket
- * 10" pneumatic tires with tube
- * Three gallon chemical tank on 7.5 H.P. and below
- * Add an accessory reel
- * 35' Power cord on all models 7.5 h.p. and below, 10 h.p. models come with 10' power cord to be hard wired into a GFCI prtected circuit

Cold Water
Electric Powered

| Model | PSI/bar | GPM/lpm | HP | Voltage /amp/phase | Pump Max. Temp. | Dimensions L x W x H | Ship Weight |
|------------|--------------|------------|----------|-----------------------|-----------------|----------------------|-------------|
| 1500AXS | 1450 / 100 | 2 / 7.6 | 2 h.p. | 120 Volt / 20 amp / 1 | 140° F | 30" x 21.5" x 36" | 88 lbs. |
| 1500AXSDE | 1450 / 100 | 2 / 7.6 | 2 h.p. | 120 Volt / 20 amp / 1 | 160° F | 30" x 21.5" x 36" | 88 lbs. |
| 1000XS | 1000 / 69 | 2.2 / 8.4 | 1.5 h.p. | 120 Volt / 15 amp / 1 | 140° F | 30" x 21.5" x 36" | 88 lbs. |
| 1500XS2 | 1500 / 103.5 | 2 / 7.6 | 2 h.p. | 120 Volt / 20 amp / 1 | 140° F | 30" x 21.5" x 36" | 95 lbs. |
| 15003XS | 1500 / 103.5 | 3 / 11.4 | 3 h.p. | 230 Volt / 20 Amp / 1 | 140° F | 30" x 21.5" x 36" | 110 lbs. |
| 2000XAR-NP | 2000 / 138 | 4 / 15.2 | 5 h.p. | 230 Volt / 26 Amp / 1 | 160° F | 37" x 23.5" x 36" | 200 lbs. |
| 2000XAR | 2000 / 138 | 4 / 15.2 | 5 h.p. | 230 Volt / 26 Amp / 1 | 160° F | 37" x 23.5" x 36" | 200 lbs. |
| 3000XAR-NP | 3000 / 207 | 4 / 15.2 | 7.5 h.p. | 230 Volt / 34 Amp / 1 | 160° F | 37" x 23.5" x 36" | 240 lbs. |
| 3000XAR | 3000 / 207 | 4 / 15.2 | 7.5 h.p. | 230 Volt / 34 Amp / 1 | 160° F | 37" x 23.5" x 36" | 240 lbs. |
| 208X | 2000 / 138 | 8 / 30.4 | 10 h.p. | 230 Volt / 40 Amp / 1 | 160° F | 48" x 27" x 22" | 250 lbs. |
| 2555X | 2500 / 172.5 | 5.5 / 20.9 | 10 h.p. | 230 Volt / 40 Amp / 1 | 160° F | 48" x 27" x 22" | 250 lbs. |
| 3050X | 3000 / 207 | 5 / 19 | 10 h.p. | 230 Volt / 40 Amp / 1 | 160° F | 48" x 27" x 22" | 250 lbs. |
| 3050XS | 3000 / 207 | 5 / 19 | 10 h.p. | 230 Volt / 40 Amp / 1 | 160° F | 48" x 27" x 22" | 250 lbs. |
| 3050VX | 3000 / 207 | 5 / 19 | 10 h.p. | 230 Volt / 40 Amp / 1 | 160° F | 48" x 27" x 22" | 250 lbs. |
| 4040X | 4000 / 276 | 4 / 15.2 | 10 h.p. | 230 Volt / 40 Amp / 1 | 160° F | 48" x 27" x 22" | 250 lbs. |
| 2000XDS | 2000 / 138 | 4 / 15.2 | 5 h.p. | 230 Volt / 26 Amp / 1 | 160° F | 37" x 23.5" x 36" | 200 lbs. |
| 3000XDS | 3000 / 207 | 4 / 15.2 | 7.5 h.p. | 230 Volt / 34 Amp / 1 | 160° F | 37" x 23.5" x 36" | 230 lbs. |



Economy Wall Mount Electric Models

Cam Spray wall mount cold water electric pressure washers help you conserve space while utilizing the high powered electric pressure washing ability of this unit. Great for businesses like restaurants and food processing.



1500AEWM

- * Triplex plunger pump with ceramic plungers and stainless steel valves and thermal relief
- * Chemical Injection
- * Trigger gun with 50' non marking hose
- * 36" wand with interchangeable nozzles in 0-15-25 and 40 degree patterns on 4 gpm and larger machines, 2 gpm machine have an adjustable spray pattern nozzle
- * Totally enclosed fan cooled motor
- * Powder coated frame with hose rack
- * Machines with * are equipped with an auto start stop switch that powers machine on and off at cycle of trigger gun
- * 35' Power cord with GFCI on all models 3 h.p. and smaller
- * 10' Power cord on all models 5 h.p. and larger to be wired directly into circuit protected by a GFCI breaker



4040EWM

Cold Water
Electric Powered

| Model | PSI/bar | GPM/lpm | HP | Voltage /amp/ phase | Pump Max. Temp. | Dimensions L x W x H | Ship Weight |
|-------------|--------------|----------|----------|-----------------------|-----------------|----------------------|-------------|
| 1000AEWM | 1000 / 69 | 2 / 7.6 | 1.5 h.p. | 120 Volt / 15 amp / 1 | 160° F | 20" x 12" x 20" | 95 lbs |
| 1500AEWM | 1450 / 100 | 2 / 7.6 | 2 h.p. | 120 Volt / 20 amp / 1 | 160° F | 20" x 12" x 20" | 98 lbs. |
| 1500AEWMA* | 1450 / 100 | 2 / 7.6 | 2 h.p. | 120 Volt / 20 amp / 1 | 160° F | 20" x 12" x 20" | 101 LBS. |
| 1500EWM2 | 1500 / 103.5 | 2 / 7.6 | 2 h.p. | 120 Volt / 20 amp / 1 | 160° F | 23" x 16" x 31" | 115 LBS |
| 1500EWM2A* | 1500 / 103.5 | 2 / 7.6 | 2 h.p. | 120 Volt / 20 amp / 1 | 160° F | 23" x 16" x 31" | 115 LBS |
| 2040EWM | 2000 / 138 | 4 / 15.2 | 5 h.p. | 230 Volt / 26 Amp / 1 | 160° F | 28" x 22" x 30" | 200 lbs. |
| 2040EWMMA* | 2000 / 138 | 4 / 15.2 | 5 h.p. | 230 Volt / 26 Amp / 1 | 160° F | 28" x 22" x 30" | 203 lbs. |
| 2040EWM3 | 2000 / 138 | 4 / 15.2 | 5 h.p. | 230 Volt / 15 Amp / 3 | 160° F | 28" x 22" x 30" | 200 lbs. |
| 2040EWMMA3* | 2000 / 138 | 4 / 15.2 | 5 h.p. | 230 Volt / 15 Amp / 3 | 160° F | 28" x 22" x 30" | 203 lbs. |
| 3040EWM | 3000 / 207 | 4 / 15.2 | 7.5 h.p. | 230 Volt / 34 Amp / 1 | 160° F | 28" x 22" x 30" | 260 lbs. |
| 3040EWMMA* | 3000 / 207 | 4 / 15.2 | 7.5 h.p. | 230 Volt / 34 Amp / 1 | 160° F | 28" x 22" x 30" | 263 lbs. |
| 3040EWM3 | 3000 / 207 | 4 / 15.2 | 7.5 h.p. | 230 Volt / 17 Amp / 3 | 160° F | 28" x 22" x 30" | 260 lbs. |
| 3040EWMMA3* | 3000 / 207 | 4 / 15.2 | 7.5 h.p. | 230 Volt / 17 Amp / 3 | 160° F | 28" x 22" x 30" | 263 lbs. |
| 3050EWM | 3000 / 207 | 5 / 19 | 10 h.p. | 230 Volt / 40 Amp / 1 | 160° F | 28" x 22" x 30" | 290 lbs. |
| 3050EWMMA* | 3000 / 207 | 5 / 19 | 10 h.p. | 230 Volt / 40 Amp / 1 | 160° F | 28" x 22" x 30" | 293 lbs. |
| 3050EWM3 | 3000 / 207 | 5 / 19 | 10 h.p. | 230 Volt / 23 Amp / 3 | 160° F | 28" x 22" x 30" | 290 lbs. |
| 3050EWMMA3* | 3000 / 207 | 5 / 19 | 10 h.p. | 230 Volt / 23 Amp / 3 | 160° F | 28" x 22" x 30" | 293 lbs. |
| 4040EWM | 4000 / 276 | 4 / 15.2 | 10 h.p. | 230 Volt / 40 Amp / 1 | 160° F | 28" x 22" x 30" | 290 lbs. |
| 4040EWMMA* | 4000 / 276 | 4 / 15.2 | 10 h.p. | 230 Volt / 40 Amp / 1 | 160° F | 28" x 22" x 30" | 293 lbs. |
| 4040EWM3 | 4000 / 276 | 4 / 15.2 | 10 h.p. | 230 Volt / 23 Amp / 3 | 160° F | 28" x 22" x 30" | 290 lbs. |
| 4040EWMMA3* | 4000 / 276 | 4 / 15.2 | 10 h.p. | 230 Volt / 23 Amp / 3 | 160° F | 28" x 22" x 30" | 293 lbs. |



Wall Mount Electric Models



- * Triplex plunger pump with ceramic plungers and stainless steel valves and thermal relief
- * Chemical Injection
- * Trigger Gun with 50' non-marking hose
- * Heavy duty wand with quick change tips in 0°, 15°, 25°, 25°, 40° soap tip (the 1500A models use a multireg adjustable nozzle in place of the individual quick change tips)
- * Totally enclosed motor
- * Pumps handle fluids up to 180° degrees fahrenheit (except 1500A-1000A 140°)
- * Powder coat frame with wand/hose rack or optional stainless steel frame (SS Models)
- * Dual chemical injection with 10' feed hoses. Dual Chemical injection not available on the 1500A models
- * Look for accessories like the wall mount swivel hose reels
- * 35' Power cord with GFCI on all models 3 h.p. and smaller
- * 10' Power cord on all models 5 h.p. and larger to be wired directly into circuit protected by a GFCI breaker

Cold Water
Electric Powered

| Model | PSI/bar | GPM/lpm | HP | Voltage /amp/phase | Pump Max. Temp. | Dimensions L x W x H | Ship Weight |
|-------------|--------------|-----------|----------|-----------------------|-----------------|----------------------|-------------|
| 1000WM | 1000 / 69 | 2.2 / 8.4 | 1.5 h.p. | 120 Volt / 15 amp / 1 | 160° F | 23" x 16" x 31" | 115 lbs. |
| 1000WM/SS | 1000 / 69 | 2.2 / 8.4 | 1.5 h.p. | 120 Volt / 15 amp / 1 | 160° F | 23" x 16" x 31" | 115 lbs. |
| 1500WM | 1500 / 103.5 | 3 / 11.4 | 3 h.p. | 230 Volt / 20 Amp / 1 | 160° F | 23" x 16" x 31" | 125 lbs. |
| 1500WM/SS | 1500 / 103.5 | 3 / 11.4 | 3 h.p. | 230 Volt / 20 Amp / 1 | 160° F | 23" x 16" x 31" | 125 lbs. |
| 2000WM/SS | 2000 / 138 | 4 / 15.2 | 5 h.p. | 230 Volt / 26 Amp / 1 | 160° F | 28" x 22" x 30" | 200 lbs. |
| 2000WM/SSM3 | 2000 / 138 | 4 / 15.2 | 5 h.p. | 230 Volt / 15 Amp / 3 | 160° F | 28" x 22" x 30" | 200 lbs. |
| 3000WM/SS | 3000 / 207 | 4 / 15.2 | 7.5 h.p. | 230 Volt / 34 Amp / 1 | 160° F | 28" x 22" x 30" | 260 lbs. |
| 3000WM/SSM3 | 3000 / 207 | 4 / 15.2 | 7.5 h.p. | 230 Volt / 17 Amp / 3 | 160° F | 28" x 22" x 30" | 260 lbs. |



Roto Models

The Roto Cart pressure washer has a rotationally molded cart that avoids rust and corrosion and is also a 6 gallon chemical tank. A quiet running motor and portability make this a great pressure washing choice.



1000X

Cold Water
Electric Powered

- * Triplex plunger pump with ceramic plungers and stainless steel valves with thermal relief
- * Adjustable pressure
- * Chemical Injection
- * Trigger Gun with 50' non marking hose
- * 36" two piece wand
- * Multi-reg zero to sixty degree pattern tip with Hi-Low for chemical injection
- * Heavy duty electric motor
- * Optional pumps handle fluids up to 160° degrees fahrenheit (models 1500AXDE and 1000XDE)
- * 8" wheels
- * Roto-molded cart frame stays free from rust and corrosion and holds 6 gallons of your favorite chemical
- * 35' power cord with GFCI

| Model | PSI/bar | GPM/lpm | HP | Voltage /amp/phase | Pump Max. Temp. | Dimensions L x W x H | Ship Weight |
|----------|--------------|-----------|----------|-----------------------|-----------------|----------------------|-------------|
| 1500AX | 1450 / 100 | 2 / 7.6 | 2 h.p. | 120 Volt / 20 amp / 1 | 140° F | 25" x 16" x 46" | 106 lbs. |
| 1000X | 1000 / 69 | 2.2 / 8.4 | 1.5 h.p. | 120 Volt / 15 amp / 1 | 140° F | 25" x 16" x 46" | 112 lbs. |
| 1500X | 1500 / 103.5 | 3 / 11.4 | 3 h.p. | 230 Volt / 20 Amp / 1 | 140° F | 25" x 16" x 46" | 122 lbs. |
| 1500AXDE | 1450 / 100 | 2 / 7.6 | 2 h.p. | 120 Volt / 20 amp / 1 | 160° F | 25" x 16" x 46" | 106 lbs. |
| 1000XDE | 1000 / 69 | 2.2 / 8.4 | 1.5 h.p. | 120 Volt / 15 amp / 1 | 160° F | 25" x 16" x 46" | 112 lbs. |



MX Models

The MX Cart models are built on a heavy powder coated steel frame and are great for commercial or household use in your business, on your vehicles, driveways, decks, siding and other pressure washing projects.



Chemical bottles and reel not included

- * Triplex plunger pump with ceramic plungers and stainless steel valves and thermal relief
- * 35' power cord with GFCI
- * Adjustable pressure
- * Dual Chemical Injection, frame will hold 2, 1 gallon containers of your chemical and control valve will adjust to choose the chemical and vary the injection rate
- * Trigger Gun with 50' non marking hose
- * 36" two piece wand
- * Quick Change Nozzles in 0, 15, 25, and 40 degree with additional detergent nozzle
- * Totally enclosed heavy duty motor
- * Pumps will handle fluids up to 140° degrees Fahrenheit, D models will handle up fluids up to 160 degrees Fahrenheit
- * 10" tires
- * Powder Coated Metal Frame with hose and wand holder and accessory reel mounting bracket.
- * Models shown with asterics are CETL approved to UL1776 specifications

Cold Water
Electric Powered

| Model | PSI/bar | GPM/lpm | HP | Voltage /amp/phase | Pump Max. Temp. | Dimensions L x W x H | Ship Weight |
|------------|--------------|-----------|----------|-----------------------|-----------------|----------------------|-------------|
| 1500AMX | 1450 / 100 | 2 / 7.6 | 2 h.p. | 120 Volt / 20 amp / 1 | 140° F | 32" x 22" x 39" | 118 lbs. |
| 1000MX* | 1000 / 69 | 2.2 / 8.4 | 1.5 h.p. | 120 Volt / 15 amp / 1 | 140° F | 32" x 22" x 39" | 106 lbs. |
| 1500MX2* | 1500 / 103.5 | 2.2 / 8.4 | 2 h.p. | 120 Volt / 20 amp / 1 | 140° F | 32" x 22" x 39" | 115 lbs. |
| 1500MX* | 1500 / 103.5 | 3 / 11.4 | 3 h.p. | 230 Volt / 20 Amp / 1 | 140° F | 32" x 22" x 39" | 122 lbs. |
| 20005MX* | 2000 / 138 | 3 / 11.4 | 5 h.p. | 230 Volt / 25 Amp / 1 | 140° F | 32" x 22" x 39" | 150 lbs. |
| 1500AMXDE | 1450 / 100 | 2 / 7.6 | 2 h.p. | 120 Volt / 20 amp / 1 | 160° F | 32" x 22" x 39" | 118 lbs. |
| 1000MXDE | 1000 / 69 | 2.2 / 8.4 | 1.5 h.p. | 120 Volt / 15 amp / 1 | 160° F | 32" x 22" x 39" | 106 lbs. |
| 20005MXDS* | 2000 / 138 | 3 / 11.4 | 5 h.p. | 230 Volt / 25 Amp / 1 | 160° F | 32" x 22" x 39" | 150 lbs. |



Command Cart

The Cam Spray command cart pressure washer model has a totally enclosed motor, 8" wheels, a roto-molded cart frame that stays free from rust and corrosion. The command cart has a holder for a 1 gallon jug.



C1000E

Cold Water
Electric Powered

- * Triplex plunger pump with ceramic plungers and stainless steel valves
- * Adjustable pressure
- * Chemical Injection
- * Trigger gun with 25' non marking hose* 36" two piece wand
- * Multi-reg zero to sixty degree pattern tip with Hi-Low for chemical injection
- * Totally enclosed motor
- * 8" wheels
- * Roto-molded cart frame stays free from rust and corrosion
- * Cart has holder for 1 gallon chemical jug
- * 35' Power cord with GFCI

| Model | PSI/bar | GPM/lpm | HP | Voltage /amp/phase | Pump Max. Temp. | Dimensions L x W x H | Ship Weight |
|--------|-----------|---------|----------|-----------------------|-----------------|----------------------|-------------|
| C1000E | 1000 / 69 | 2 / 7.6 | 1.5 h.p. | 120 Volt / 15 amp / 1 | 140° F | 21" x 16" x 36" | 65 lbs. |



Base Mount

Cam Spray's base mounted pressure washers are ideal for detail shops, automotive, motorcycle and equipment dealerships. Our base mount pressure washers have sturdy base mount plates designed for shelf or permanent installation.



**Cold Water
Electric Powered**

- * Triplex plunger pump with ceramic plungers and stainless steel valves
- * Adjustable pressure
- * Chemical Injection
- * Trigger Gun with 50' non marking hose
- * Heavy duty wand with quick change tips in 0°, 15°, 25°, 40° soap tip
- * Totally enclosed motor
- * Look for optional accessories like the swivel hose reel with wall mounting bracket
- * 10' Power cord to be wired into circuit with GFCI breaker

| Model | PSI/bar | GPM/lpm | HP | Voltage /amp/phase | Pump Max. Temp. | Dimensions L x W x H | Ship Weight |
|------------|--------------|----------|----------|-----------------------|-----------------|----------------------|-------------|
| 1500GEAR | 1500 / 103.5 | 3 / 11.4 | 3 h.p. | 230 Volt / 20 Amp / 1 | 160° F | 28" x 20" x 13" | 86 lbs. |
| 2000GEAR | 2000 / 138 | 4 / 15.2 | 5 h.p. | 230 Volt / 26 Amp / 1 | 160° F | 28" x 20" x 13" | 150 lbs. |
| 3000GEAR | 3000 / 207 | 4 / 15.2 | 7.5 h.p. | 230 Volt / 34 Amp / 1 | 160° F | 28" x 20" x 13" | 180 lbs. |
| 3040STAT | 3000 / 207 | 4 / 15.2 | 7.5 h.p. | 230 Volt / 34 Amp / 1 | 160° F | 40" x 24" x 47" | 300 lbs. |
| 3050BSTAT* | 3000 / 207 | 5 / 19 | 10 h.p. | 230 Volt / 40 Amp / 1 | 160° F | 40" x 24" x 47" | 325 lbs. |
| 208STAT | 2000 / 138 | 8 / 30.4 | 10 h.p. | 230 Volt / 40 Amp / 1 | 160° F | 40" x 24" x 47" | 325 lbs. |



Hand Carry

The hand carry Cam Spray pressure washers can be conveniently moved and transported for pressure washing on location or in-shop.



1500C2

- * Triplex plunger pump with ceramic plungers and stainless steel valves and thermal relief valve
- * 35' Power cord with ground fault interrupter
- * Adjustable pressure
- * Chemical Injection
- * Non-marking hose
- * Trigger Gun with 25' non marking hose
- * 36" two piece wand
- * Multi-reg zero to sixty degree pattern tip with Hi-Low for chemical injection
- * D models will handle up fluids up to 160 degrees Fahrenheit

Cold Water
Electric Powered



1500A

| Model | PSI/bar | GPM/lpm | HP | Voltage /amp/phase | Pump Max. Temp. | Dimensions L x W x H | Ship Weight |
|---------|--------------|---------|----------|-----------------------|-----------------|----------------------|-------------|
| 1000A | 1000 / 69 | 2 / 7.6 | 1.5 h.p. | 120 Volt / 15 amp / 1 | 160° F | 14" x 12" x 10" | 50 lbs. |
| 1500A | 1450 / 100 | 2 / 7.6 | 2 h.p. | 120 Volt / 20 amp / 1 | 160° F | 18" x 12" x 11" | 68 lbs. |
| 1500C2 | 1500 / 103.5 | 2 / 7.6 | 2 h.p. | 120 Volt / 20 amp / 1 | 160° F | 24" x 16" x 15" | 90 LBS. |
| 1500ADE | 1450 / 100 | 2 / 7.6 | 2 h.p. | 120 Volt / 20 amp / 1 | 160° F | 18" x 12" x 11" | 68 lbs. |



Hydraulic Driven Models

Cam Spray provides quality hydraulic powered cold water pressure washers for the industrial and commercial market. Our hydraulic pressure washers transform hydraulic pressure to water pressure.



304HYD

- * Triplex plunger pump with ceramic plungers and stainless steel valves
- * Transforms hydraulic pressure to water pressure
- * Heavy duty wand with quick change tips in 0, 15°, 25°, 40° soap tip
- * Attaches to most hydraulic power sources
- * Trigger gun with 50' non marking hose.

Cold Water
Hydraulic Powered

| Model | PSI/bar | GPM/lpm | Required Oil Flow | Required Oil Pressure | Dimensions L x W x H | Ship Weight |
|---------|------------|----------|-------------------|-----------------------|----------------------|-------------|
| 203HYD | 2000 / 138 | 3 / 11.4 | 5 gpm | 2200 psi | 10" x 10" x 10" | 49 lbs. |
| 304HYD | 3000 / 207 | 4 / 15.2 | 12 gpm | 2000 psi | 10" x 10" x 10" | 49 lbs. |
| 404HYD | 4000 / 276 | 4 / 15.2 | 12 gpm | 1500 psi | 10" x 10" x 10" | 49 lbs. |
| 5055HYD | 5000 / 345 | 5.5 / 19 | 15 gpm | 2000 psi | 18" x 18" x 18" | 65 lbs. |



Custom Manufacturing Capabilities

Custom Built Enclosed Trailer Pressure Washer for contract cleaning.



Custom Built Skid Mount Jetter, 100 h.p. Electric, 60 gpm, 2000 psi for University of Kentucky Hospitals.



11 gpm, 2000 PSI Hot Water skid machine for Los Angeles Water District.





Custom Built



Accessories

| Part # | Description |
|-------------------|---|
| 540106 | Oil Fired Heater Attachment For use with cold water pressure washers up to 4000 PSI at 4 GPM |
| 540178S | Q Series Low Fuel Shutdown |
| GEN D30001 | 50' Capacity Reel (50' hose not included) |
| GEN D30002 | 100' Capacity Reel (100' hose not included) |
| 526496.KIT | 200' Swivel Reel Kit (200' hose not included) Assembly Required Hose reel will hold up to 200' of 3/9" hose with a 4' hose to connect from the reel to the pressure washer. Order correct bracket listed below for your application. Will attach directly to Q Series and SH Series frames without any additional mounting bracket |
| 526496.1KIT | 100' Swivel Reel Kit (100' hose not included) Assembly Required. Hose reel will hold up to 100' x 3/8" hose with a 4' hose to connect from the reel to the pressure washer. Order correct bracket listed below for your application. |
| 526574 | Universal Bracket |
| 526575 | Wall Mount Bracket |
| 526576 | Floor Mount Bracket |
| | Constructed for residential light commercial use, single handle design, sturdy brush guard with dual tips. Order # to match up with the Tip Size of your machine. Item is designed to attach to a trigger gun with at least an 18" wand with Female Twist Fast Socket Adapter. |
| 526036 | 13" Flat Surface Cleaner with wheels |
| 526033.(tip size) | 16" Flat Surface Cleaner Industrial 30" Aluminum housing affixed to a steel sub frame with front caster wheel for maneuverability. Equipped with trigger gun and designed to run directly from your pressure hose by removing unit's trigger gun and wand. Order # to match up with the Tip Size of your machine. |
| 526028.(tip size) | 30" Flat Surface Cleaner #4 |





527300

Medium Duty Sandblaster

Machine use up to 3500 PSI @ 4 GPM. Combines high pressure water and sand to remove graffiti, paint, baked on grease, rust and much more. Constructed of a bronze body, steel orifice and a replaceable tungsten carbide tip. Comes with sand blast head, hose and probe with twist fast adapter to couple to end of wand.



509300

Heavy Duty Sandblaster

Machine use up to 4000 PSI at 10 GPM. Combines high pressure water with sand to remove graffiti, paint, baked on grease, rust and much more. Constructed of an aluminum body, hardened stainless steel tip and tungsten carbide sand nozzle. Comes with a sand blast head, hose and probe with a twist fast adapter to couple to end of wand.

528025

Reciprocating Brush

10" Rectangular Lexan brush saves time and soap removing road film and dirt. Feathered PVC bristles moving side to side are safe to use on any surface. Rated for use on any machine producing up to 4 GPM. Features strong Lexan construction, bronze bearings, 7" angle adjusting wand and twist fast adapter to adapt directly to wand. Operates under low pressure enabling use of the low pressure soap injector. Order # M22-QC Adapter if your machine uses Q Meg tips.



508115

Rotating Brush

7" Diameter spinning Lexan brush saves time and soap removing road film and dirt. Feathered PVC bristles are safe to use on any surface. Rated for use on any machine up to 4 GPM. Will even rotate under garden hose pressure. Features strong Lexan construction, bronze bearings, anti-splash design and 7" angle adjusting wand with twist fast adapter to hook up directly to wand. Operates under low pressure enabling use of the low pressure soap injector. Order # M22-QC Adapter if your machine uses Q Meg tips.



528045

R.V. Brush

Big 15" brush saves time and soap removing road film and dirt. Feathered PVC bristles are safe to use on any surface. Operates on any machine producing 4 GPM. Features strong Lexan construction with a twist fast connector to adapt to end of wand. Operates under low pressure enabling the use of the low pressure soap injector. Order # M22-QC Adapter if your machine uses Q Meg tips.



527600

Stationary Brush

6" Brush saves time and soap removing road film and dirt. Feathered PVC bristles are safe to use on any surface. Operates on any machine producing 4 GPM. Features strong Lexan construction with a twist fast connector to adapt to end of wand. Operates under low pressure enabling the use of the low pressure soap injector. Order # M22-QC Adapter if your machine uses Q Meg tips.



528050

Twist Fast Brush Adapter





528060

Plastic replacement adapter for brushes and brush extensions.

24" Brush Adjustable Extension

Extension for use with brushes only. Adapts to brushes by taking the twist fast adapter off brush, screwing extension on to brush and then screwing twist fast adapter to end of extension.



528070

24" Fixed Brush Extension

Extension for use with brushes only. Adapts to brushes by taking the twist fast adapter off brush, screwing extension on to brush and then screwing twist fast adapter to end of extension.

527100

Foamer Attachment with 16 oz bottle

527100M

Foamer Attachment with 32 oz bottle

When chemical or soap is used with this attached to the discharge of the pressure washer it will create foam. This will stick to the surface longer so the detergent will have more time to work on the film, dirt or grease. To be used with machiens from 700 PSI to 3000 PSI. Includes twist fast adapter to couple to wand. Order # M22-QC Adapter if your machine uses Q Meg tips.



M22-QC

Brush and Foamer adapter for models with Q-Meg style tips

527651

20' Hose Kit

527653

50' Hose Kit

527660

100' Hose Kit

Prssure hoses are rated up to 3000 PSI. They come with twist fast adapters to hook directly to the hose that comes with the unit.

527207

3.0 Turbo Wand with Twist Fast male adapter

527208

3.5 Turbo Wand with Twist-Fast male adapter

Use with 1450 PSI@2.0-2.2 GPM unit

527208.1

4.0 Turbo Wand with Twist-Fast male adapter

Use with 1000 PSI@2.0-2.2 GPM unit

527208.2

5.0 Turbo Wand with Twist-Fast male adapter

Use with 1500 PSI@3.0-3.5 GPM unit

TS-58-2-3.5

3.5 Turbo Tip Medium Duty

TS-58-2-4

4.0 Turbo Tip Medium Duty

TS-58-2-5

5.0 Turbo Tip Medium Duty

TS-58-2-5.5

5.5 Turbo Tip Medium Duty

TS-58-2-6

6.0 Turbo Tip Medium Duty



Accessories



- TS-58-2-7 7.0 Turbo Tip Medium Duty
- TS-58-5-3.5 # 3.5 Turbo Tip Heavy Duty
- TS-58-5-4 # 4 Turbo Tip Heavy Duty
- TS-58-5-4.5 # 4.5 Turbo Tip Heavy Duty
- TS-58-5-5 # 5 Turbo Tip Heavy Duty
- TS-58-5-5.5 # 5.5 Turbo Tip Heavy Duty
- TS-58-5-6 # 6 Turbo Tip Heavy Duty
- TS-58-5-7 # 7 Turbo Tip Heavy Duty
- TS-58-5-10 # 10 Turbo Tip Heavy Duty
- TS-58-5-12 # 12 Turbo Tip Heavy Duty
- TS-58-5-15 # 15 Turbo Tip Heavy Duty



Purchase the tip # that matches the tip size of your machine.

*Purchase the correct adapter for use with your wand, either a twist fast plug or a quick coupler plug if your machine uses Q Meg tips. If your wand separates in half using a twist fast system, purchase the 18" wand extension for operator safety. All items are shown after the turbo tip listing.

- 527700 Twist Fast male plug for turbo tip
- 510060.1 Male Quick Coupler plug for turbo tips
- 542082.1 18" wand extension with twist fast plug for turbo tips

- 509377 24" Wand Extension
- 509370 36" Wand Extension
- 509368 79" Wand Extension



Made of 1/4" plated steel and a plastic insulator to protect hands. Good for pressures up to 4000 PSI. Purchase the correct adapters to connect to your existing wand.

- 509932 8'-24' Telescoping Wand Extension w/trigger gun hooks directly to hose

*Comes with trigger gun and will attach directly to existing hose, does not include tip.



- 510065 1/4" Socket for models w/ Q Meg tips
- 510060 1/4" plug for models w/ Q Meg tips
- 527705 Twist-Fast plug for models with twist-fast wands
- 527800 Twist-Fast socket for models with twist-fast wands



- 542090 Accessory cart for hand carry electric models



510406 KIT
526395

Accessory wall mount kit for hand carry electrics
Backflow preventor

Prevents contaminant from getting back into the potable water supply.
For use with all models. Hooks up to hydrant before your garden hose.

SLUDGE-15-40
SLUDGE-15-50
SLUDGE-15-60

Sludge Pump with #4 Orifice
Sludge Pump with #5 Orifice
Sludge Pump with #6 Orifice

Works on the venturi principal. 0 degree nozzle is held in the suction cone and creates a vacuum on the cone, drawing a large volume of water through the 1.5" tubing. Great for cleaning out ponds and pits.



540097
540097.1

10" Diverter
8" Diverter

Draft diverters are used when installing any hot water pressure washer indoors. They help induce air from the room creating a positive draft for ventilation. Order proper size based on the diameter of the exhaust discharge of the heating coil.



552500
552510

10" Blast Gate
8" Blast Gate

Blast gates are used when installing any hot water pressure washer indoors and in climates where outside temperatures and down drafts can cause freezing of the coil while the machine is not in operation. It is also recommended to save on heating costs and cut down on drafts when the machine is not in use.



552000 kit

Draft Inducer Kit

Kit is mounted in the vent system, includes wiring harness to tie into the machine, fan and fittings to force vent air to

540423C
540425

Stainless Steel Ceiling Mount Boom
Stainless Steel Wall Mount 69" Boom




200DS3
200DS4

Accessory Cart with 200' 3000 PSI Max. Jetter hose, nozzle not included
Accessory Cart with 200' 4000 PSI Max. Jetter hose, nozzle not included

509374J
542040
542041
542042

Pressure wash gun attachment for jettors
#4 Multi reg tip for accessory gun
#5 Multi reg tip for accessory gun
#6 Multi reg tip for accessory gun



Accessories

Working well under pressure!



Quality products from these suppliers help us to produce the finest equipment for commercial and industrial use.