

testo 470



1

1	3
2	4
2.1.	4
2.2.	5
2.3.	6
3	7
3.1.	7
3.2.	7
3.3.	8
4	9
4.1.	9
4.2.	9
5	10
5.1.	10
5.1.1.	/	10
5.1.2.	11
6	13
6.1.	13
6.2.	14
6.2.1.	14
6.2.2.	15
6.2.3.	17
7	18
7.1.	/	18


2

21.

>


>

>

	
i	
1. ...	
2. ...	
> ...	
- ...	
RPM	
OK	


 !

>


 !

>

>

 !

>

 !

>

23.

>

/

>

()

Testo.

3

3.1.

testo 470

testo 470

-
-
-
-
-

3.2.

testo 470

:

testo 470:

-
-
-
-
-
-
-
-
-
-

(2 .)

2 . (AA)

3.3.

	1 - 99999 /
	/ - ,
	0,02 % (± 1)
	2x AA 1,5 2x NiMH (AA)
	30 ()
	. 40
	ABS
	160 x 60x 15 .
	. 50 . ()
	0 – 50
	-20 – 70
	1
	. www.testo.ru/warranty

4

4.1.



1 / -

2

3

4

5 /

6

4.2.

- **LOBAT:**

- **MEM:**

(MAX)

(MIN),
(AV).

5

5.1.

5.1.1.

/

i

, /
/

1.

2.

(

(AA)/
!)

NiMH (AA)

3.

1





5.1.2

- ✓ /
1. testo 470
 2. 2 4
- 6"




3. MODE :



4. 5



5. 5 1 -
 6. 5 2 -

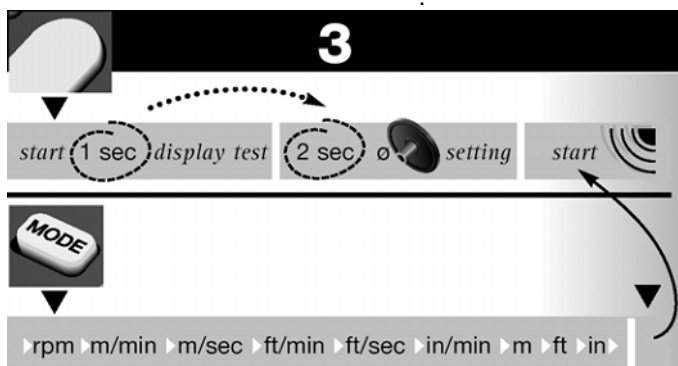


i

LOBAT




LOBAT



6

6.1.

MODE

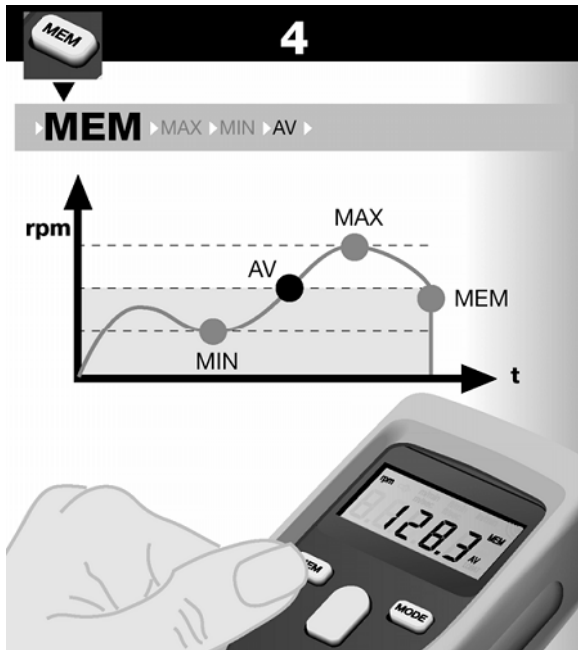

6.2

6.2.1.

1.

.(. .)



2.

(.)

3.


600 .

4.



6.2.2.

- 1.
- 2.

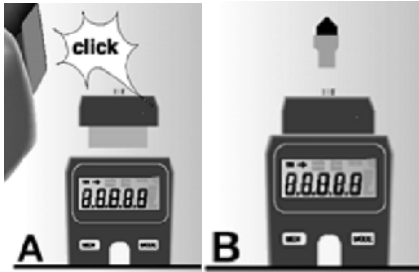

- 3.

MODE



- 4.
- 5.



6.

m/min

MODE.

i

()

MODE **6**

rpm **m/min** m/sec ft/min ft/sec in/min m ft in

Speaker icon

rpm → m/min ft/min in/min
m/sec ft/sec

0.0.0.0.0

	0.1 m	6"	12"
m/min	0.10-1999	0.10-1524	0.40-609.6
ft/min	0.40-6550	0.40-5000	0.40-2000
in/min	4.00-78700	4.00-60000	4.00-24000
m/sec	0.10-33.30	0.10-25.40	0.10-10.16
ft/sec	0.10-109	0.10-83.33	0.10-33.33
m	0.00-99999	0.00-99999	0.00-99999
ft	0.00-99999	0.00-99999	0.00-99999
in	0.00-99999	0.00-99999	0.00-99999

click

A

B

6.2.3.



7

7.1.

/

i

, /
/

1.

2.

(

(AA/
!)

NIMH (AA)

3.

>



« »
117105, . , ..
.17, 1, -4-6
. +7 (495) 788 -98-11
+7 (495) 788-98-49
<http://www.testo.ru>
info@testo.ru